


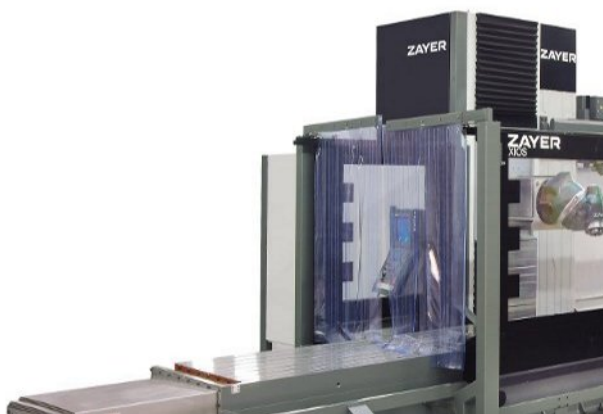

Product information:

XIOS

BED TYPE

SPECIFICATIONS

	XIOS
Table length - mm	3.000 - 5.000
Table width - mm	1.000 (1.300)*
Longitudinal travel - mm	3.000 - 5.000
Cross travel - mm	1.200 (1.600)*
Vertical travel - mm	1.200 (1.600 - 2.000)*
Min – max distance from table to spindle nose - mm	0-1.145 (1.545-1.945)*
Working Feed - mm/min	up to 15.000
Rapid feed - mm/min	30.000
Drives of X-Y-Z - mm	X: Two motors rack and pinion Y,Z: Ball screws
Power - kW	32 (40)*
Speed of the spindle head - min-1	3.000 (4.500-6.000)*
Positioning and repeatability accuracy - mm	0,008/4.000-0,005
Tool magazine	30 (40 - 60 - 80)*
Allowed weight on the table - kg	10.000
Approx. net weight - kg	20.000 - 32.000

(Optional) *

ACCESSORIES

	XIOS
HEADS	
45° Automatic Head 360.000 pos, 0,001°	•
45° Automatic Head 360 x 1° - 144 x 2,5°	○
30° automatic head 360.000 pos. 0,001° / continuous rotation	○
30° automatic head, 360.000 positions each 0,001° / continuous rotation with electrospindle.	○
Change of heads	—
Coolant tank	1000 l, 30l/min - 22 bar / 60 l/min - 5 bar
Chip Conveyor	•
Complete enclosure open on top	•

XIOS

Complete enclosure with ceiling

○

- Standard
- Optional
- No available

PRODUCT IMAGES



CE Protections



CE Protections



Complete enclosure



Complete enclosure



Complete enclosure



HEAD IMAGES



45° Automatic Head
360.000 pos, 0,001°



30° automatic head
360.000 pos. 0,001° /
continuous rotation



30° automatic head,
360.000 positions each
0,001° / continuous
rotation with
electrospindle.

RELATED APPLICATIONS



FRANCIS TURBINE
HYDROELECTRIC



CAPITAL GOODS
GENERAL MACHINING



MACHINE TOOL
GENERAL MACHINING



MOULD
MOULDS AND DIES



DIE
MOULDS AND DIES

Más información en www.zayer.com